

NEW



New available Safety Hook Extreme

- ▶ 18th Edition IET Wiring Regulations, July 2018.
- ▶ British Standard BS7671:2018
- ▶ OSHA Part 1926.150:Subpart F
- ▶ CPR NEN8012: 2015

UV Stabilized
Flame Retardant
Cold Weather Rated




NEW



CABLE SAFETY Safety Hook

Specifications

Safety Hook Extreme designed for use in extreme environments. The extreme Hook is UV stabilized, Flame Retardant and Cold Weather Rated. The Safety Hook Extreme is marked: UV+FR+COLD.

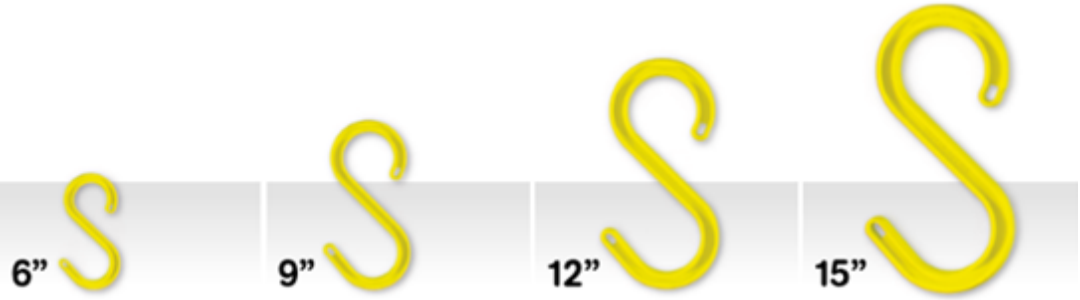

	6"	9"	12"	15"
Size cable opening (top)	1.1" = 2.7 cm	1.5" = 3.9 cm	2.1" = 5.4 cm	2.5" = 6.4 cm
Size cable opening (bottom)	1.6" = 4.0 cm	2.6" = 6.6 cm	3.5" = 8.9 cm	4.5" = 11.4 cm
Maximum load	40 kg – 88 lbs	55 kg – 121 lbs	190 kg – 418 lbs	265 kg – 584 lbs
Weight	40 gram – 0.06 lbs	103 gram – 0.23 lbs	292 gram – 0.64 lbs	518 gram – 1.14 lbs
Material	Glass reinforced polyester – injection molded product			
Standard Color	● Yellow ● Glow-in-the-dark			
UV	Stabilized, guarantee 10 years - under normal usage conditions			
Flame Retardant	Flame Retardant, UL Recognized, 94V-0 Flame Class Rating (3)			
Cold Fatigue	Protection in cold weather environment			

MODEL

CHARACTERISTICS

Safety Hook Extreme

- Helps with cable management and housekeeping
- Are easy to use. Cables and hoses are cleared quickly
- Four sizes: 6", 9", 12", and 15" [appr. 15, 23, 30, 38 cm]
- Easily secure loads using a tie-wrap through holes in the hook
- Do not conduct electricity or heat
- Durable over 25 years of active use in heavy industries
- Sold in batches of 25 pieces - minimum order - delivered from stock

> From quantities of >500 pieces (per type) it is possible to engrave the Safety Hook or receive it in a special color. Production time 3 to 4 weeks.

> Other standard colors are white, black, blue, green and red. Minimum order quantity 500 pieces, price per piece the same as yellow. Production time 3 to 4 weeks.